



1/4" Twist socket set, 4-pcs.

KS TOOLS 913.1450 consists of:

| | |
|-------------------------|--------------------|
| 4 x Twist sockets 1/4": | 8 -10 - 12 - 13 mm |
|-------------------------|--------------------|



1/4" Twist sockets

| KS TOOLS | dim. | | |
|----------|-------|---------|-------|
| 913.1408 | 8 mm | 13,5 mm | 32 mm |
| 913.1410 | 10 mm | 15,0 mm | 32 mm |
| 913.1412 | 12 mm | 18,0 mm | 32 mm |
| 913.1413 | 13 mm | 19,0 mm | 32 mm |



3/8" Twist socket set, 4-pcs.

KS TOOLS 913.3850 consists of:

| | |
|-------------------------|--------------------|
| 4 x Twist sockets 3/8": | 8 -10 - 12 - 13 mm |
|-------------------------|--------------------|



3/8" Twist sockets

| KS TOOLS | dim. | | |
|----------|-------|---------|-------|
| 913.3860 | 10 mm | 15,1 mm | 32 mm |
| 913.3861 | 11 mm | 16,6 mm | 32 mm |
| 913.3862 | 12 mm | 17,8 mm | 32 mm |
| 913.3863 | 13 mm | 18,8 mm | 32 mm |
| 913.3864 | 14 mm | 20,3 mm | 32 mm |
| 913.3865 | 15 mm | 21,6 mm | 35 mm |
| 913.3866 | 16 mm | 23,0 mm | 35 mm |
| 913.3867 | 17 mm | 24,4 mm | 35 mm |
| 913.3869 | 19 mm | 26,5 mm | 35 mm |

Further twist sockets can be found in the wheels and tyres section on page 582 - 583



3/8" Twist socket set, 10-pcs.

KS TOOLS 913.3855 consists of:

- 9 x Twist sockets 3/8": 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 19 mm
- 1 x Removal bar



1/2" Twist socket set, 6-pcs.

KS TOOLS 913.1240 consists of:

- 5 x Twist sockets 1/2": 19 - 20 - 22 - 23 - 25 mm
- 1 x Removal bar



1/2" Twist sockets

| KS TOOLS | dim. | | |
|-----------------|-------|----------|---------|
| 913.1249 | 19 mm | 26,40 mm | 41,3 mm |
| 913.1250 | 20 mm | 28,30 mm | 41,3 mm |
| 913.1252 | 22 mm | 30,00 mm | 41,3 mm |
| 913.1253 | 23 mm | 32,90 mm | 41,3 mm |
| 913.1255 | 25 mm | 34,45 mm | 41,3 mm |



extra flat!



Twist socket set, 10-pcs.

- KSTOOLS 913.3880** consists of:
- To release and unscrew tight nuts and bolts with damaged threads or rounded heads
 - Special left handed thread with 6 conical reducing cutting edges
 - Slim line and compact model
 - The drive can be with either socket, ring or open-ended spanners

Twist sockets

| KSTOOLS | | |
|----------------|-----|-------|
| 913.3881 | M 9 | 16 mm |
| 913.3882 | M10 | 16 mm |
| 913.3883 | M11 | 18 mm |
| 913.3884 | M12 | 19 mm |
| 913.3885 | M13 | 19 mm |
| 913.3886 | M14 | 21 mm |
| 913.3887 | M15 | 23 mm |
| 913.3888 | M16 | 24 mm |
| 913.3889 | M17 | 26 mm |
| 913.3890 | M19 | 27 mm |



1/4" Five star bit set, tamper proof, 8-pcs.

KS TOOLS 911.1480 consists of:


- 7 x Five star bit 1/4": TS10-TS15-TS20-TS25-TS27-TS30-TS40
- 1 x Bit sockets adaptor 1/4" spring clamp ring

- Can be used on: VW, Mercedes Benz, Audi, Bosch
 - E.g. on injection pump system
 on trucks form VW, Mercedes e.g. (Atego, Actros)
 - Control system, engine immobiliser EWS3 on: Rover 75, MG, ZT
 - Injection pumps, alternators: Audi, Ford, John Deere, Mercedes Benz, MAN, VW



1/4" Five star bits, tamper proof, length 25 mm

| KS TOOLS | Size | |
|----------|------|---|
| 911.3101 | TS10 | ☆ |
| 911.3102 | TS15 | ☆ |
| 911.3103 | TS20 | ☆ |
| 911.3104 | TS25 | ☆ |
| 911.3105 | TS27 | ☆ |
| 911.3106 | TS30 | ☆ |
| 911.3107 | TS40 | ☆ |

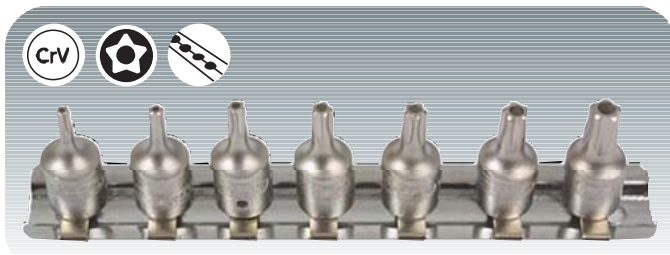

1/4" Five star bit socket set, 7-pcs., tamper proof

KS TOOLS 911.1470 consists of:

- 7 x Bit sockets 1/4": TS10 - TS15 - TS20
- TS25 - TS27 - TS30 -TS40

- Can be used on: VW, Mercedes Benz, Audi, Bosch
 - E.g. on injection pump system
 on trucks form VW, Mercedes e.g. (Atego, Actros)
 - Control system, engine immobiliser EWS3 on: Rover 75, MG, ZT
 - Injection pumps, alternators: Audi, Ford, John Deere, Mercedes Benz, MAN, VW



1/4" Five star bit sockets, tamper proof

| KS TOOLS | dim. | |
|----------|------|---|
| 911.1471 | TS10 | ☆ |
| 911.1472 | TS15 | ☆ |
| 911.1473 | TS20 | ☆ |
| 911.1474 | TS25 | ☆ |
| 911.1475 | TS27 | ☆ |
| 911.1476 | TS30 | ☆ |
| 911.1477 | TS40 | ☆ |














Five star angled key set, tamper proof, in a folding holder, 9-pcs.

KS TOOLS 151.2470 consists of:

- 9 x Five star angled keys: TS10 -TS15 -TS20 -TS25 -TS27 -TS30 -TS40 - TS45 -TS50



Multi tooth (XZN®) T-Handled key wrench set, 16-pcs., for Volkswagen, Skoda, Seat, Audi, Mercedes Benz

| KSTOOLS 151.8110 consists of: | | | |
|---|-------------|---|---|
| 4 x T-Handled key wrench Multi tooth (XZN®): | M4 x 100 mm | ○ | 3 x Multi tooth bits 1/4" M5 - M6 - M8 |
| | M5 x 150 mm | ○ | 2 x Multi tooth bits 10 mm M10 - M12 |
| | M6 x 150 mm | ○ | 1 x Universal joint 1/4"   |
| | M8 x 200 mm | ○ | 1 x Bit adaptor 1/2" x 10 mm   |
| 1 x T-Handled key wrench 1/2" | |   | 1 x Bit adaptor female square 1/4" x 1/4" male hexagonal, clamp spring ring   |
| 1 x T-Handled key wrench 1/4", magnetic, for bits and sockets | |   | 1 x Socket screwdriver flexible for 1/4" bits  |
| 1 x Adaptor 1/4" square/hexagonal | | | |



1/2" RIBE® Bit socket set, tamper proof 110 mm long, 10-pcs.

KS TOOLS 911.1630 consists of:
 9 x RIBE® Sockets 1/2": MB5 - MB6 - MB7 - MB8 - MB9 - MB10 - MB12 - MB13 - MB14
 1 x Clip rail



RIBE® Special bit set 5/16", 14-pcs.

| KS TOOLS 911.4306 consists of: | | dim. | dim. |
|---|-----|------|------|
| - Can be used on fittings in the engine compartment | | | |
| - E.g. Fiat, Alfa Romeo, Lancia, Renault, Peugeot, Industrial engines | | | |
| 6 x Special bits, length 38 mm: | | | |
| 911.5165 | M5 | | |
| 911.5166 | M6 | | |
| 911.5167 | M7 | | |
| 911.5168 | M8 | | |
| 911.5169 | M10 | | |
| 911.5170 | M12 | | |
| 7 x Special bits, length 100 mm: | | | |
| 911.5171 | M7 | | |
| 911.5172 | M8 | | |
| 911.5173 | M9 | | |
| 911.5174 | M10 | | |
| 911.5175 | M12 | | |
| 911.5176 | M13 | | |
| 911.5177 | M14 | | |
| 1 x 911.5178 Bit-adaptor 1/2" x 5/16" with retaining ring | | | |



Wedge design bit socket M 9/10 - 1/2",
for cylinder head bolts from: AUDI, VW, SKODA, SEAT

KS TOOLS
911.1395 Wedge design bit socket E24



Camshaft belt tension tester

KS TOOLS

- 150.3015**
- This mechanical device is for the controlled measurement of the tension of timing belts
 - For the precise and exact measurement of belt tension according to manufactures data

| | |
|-------------------------------------|---------------------|
| Scale: | 0 - 20 mm |
| Increments: | in mm |
| Mechanism: | mechanical (spring) |
| Rotation adjustment to 360°: | 1 mm |
| Rotation ratio: | 1/10 mm |
| Rotation adjustment against | |
| force per full rotation: | 10 N (=1kp) |
| Weight: | 0,260 kg |