




**1/2"** Stud puller set, 4-pcs., operate right to left handed

**KS TOOLS 152.1100** consists of:

4 x Stud puller: 6 - 8 - 10 - 12 mm

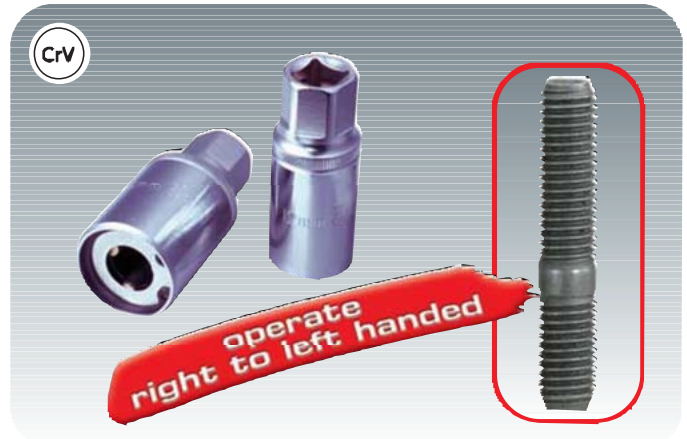

**1/2"** Stud puller

<b>KS TOOLS</b>	dim.
152.1005	5 mm
152.1006	6 mm
152.1007	7 mm
152.1008	8 mm
152.1010	10 mm
152.1012	12 mm
152.1014	14 mm



**1/2"** Stud puller set, 7-pcs., operate right to left handed

**KS TOOLS 152.1101** consists of:

7 x Stud puller: 5 - 6 - 7 - 8 - 10 - 12 - 14 mm


- Stud screws in and out without using counter nuts on the bolt
- 3 Rollers clamp onto the thread for a sure grip
- Male hexagonal dim. 21 mm male M5 dim. 19 mm
- Through socket for extra long studs






**Sparkplug cap plier set, 3-pcs., extra long**

<b>KS TOOLS</b> 500.7500 consists of:	↳ mm ◄
1 x Sparkplug cap pliers, 6 mm, 1/4"	295
1 x Sparkplug cap pliers, 12 mm, 1/2"	295
1 x Sparkplug cap pliers, 20 mm, 3/4"	295

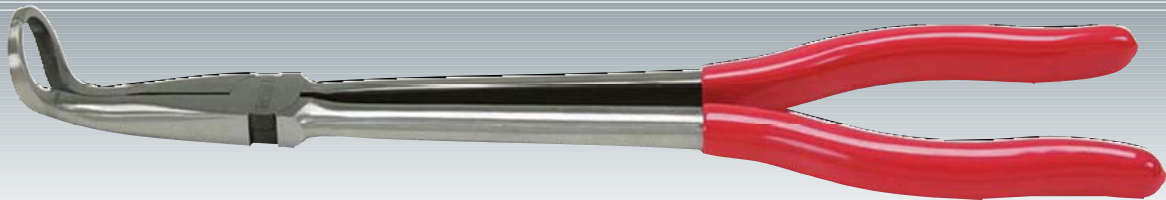

**Sparkplug cap pliers**

<b>KS TOOLS</b>	↳ mm ◄
500.7501 Sparkplug cap pliers, 6 mm, 1/4"	295
500.7502 Sparkplug cap pliers, 8 mm, 5/16"	295
500.7504 Sparkplug cap pliers, 12 mm, 1/2"	295
500.7503 Sparkplug cap pliers, 20 mm, 3/4"	295

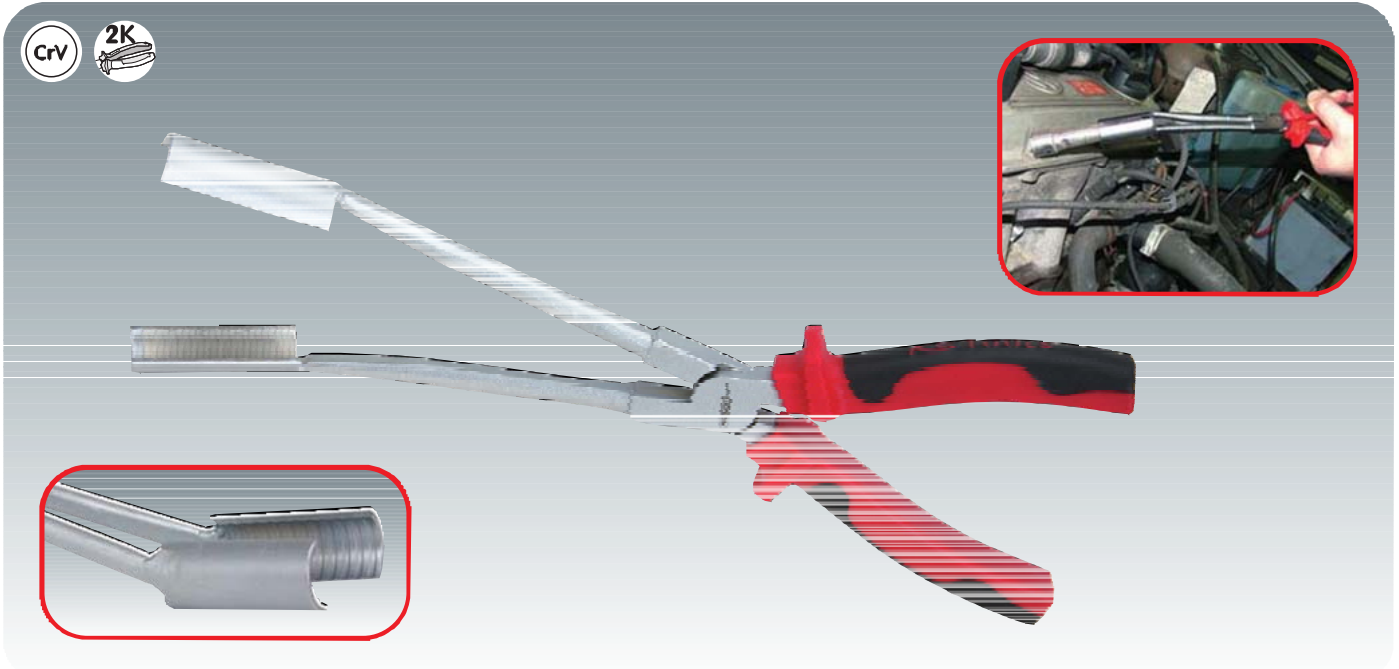

**Sparkplug pliers**

**KSTOOLS** | mm |

**500.7510** Sparkplug pliers, sleeve length 50 mm 290

- With the length and angle of these pliers, gripping of spark plugs is possible, even when very deep set in the engine
- The length of the pliers allow for safe working on hot engines
- Suitable for all cars



**Feeler gauge**

**KSTOOLS**

**300.0600**

- 20 feelers hardened feather steel. Range 0,05 – 1,00mm; increasing in 0,05 mm steps
- 1 feeler out of non ferrous brass for electronic ignitions, size 0,10 mm
- All feelers double marked in mm + inch
- Length the feelers: 100 mm
- Metal sheath with integral locking screw




**Sparkplug wire brush**

**KSTOOLS** | mm |

**201.2315** Sparkplug brush, steel bristles 170

**201.2316** Sparkplug brush, brass bristles 170

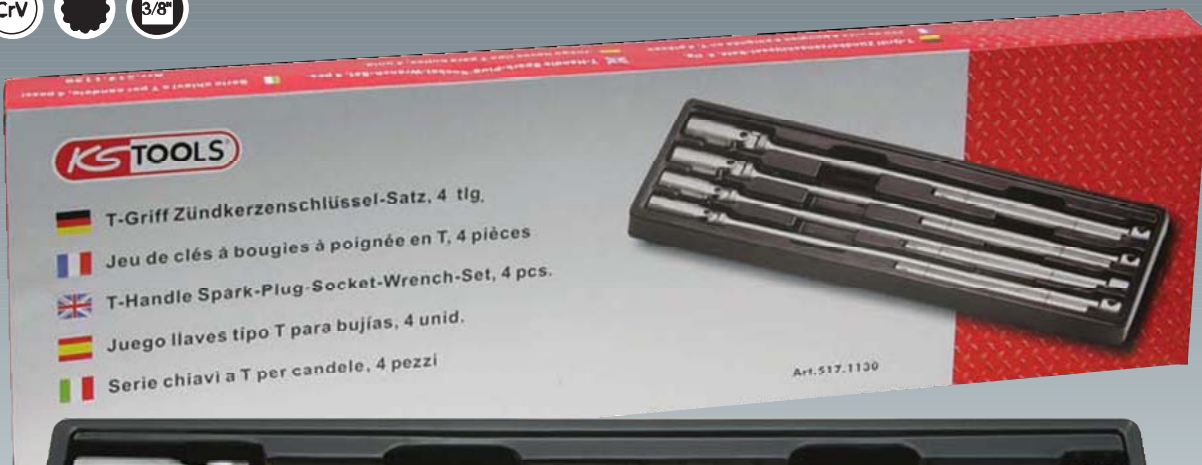


**Incl. new dim. 14!**



**T-Handle sparkplug wrench set, 4-pcs., screwed universal joint, with square drive for 3/8" ratchets, chrome plated, matt finish**


**KS TOOLS 517.1130** consists of:

4 x T-Handle sparkplug wrench 500 mm length: 14 - 16 - 18 - 21 mm

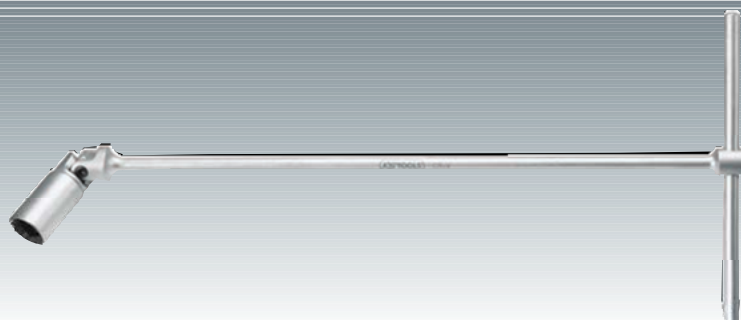

**T-Handle sparkplug wrench, screwed universal joint, with square drive for 3/8" ratchets, chrome plated, matt finish**


<b>KS TOOLS</b>	dim.	mm
517.1131	14 mm	500
517.1132	16 mm	500
517.1133	18 mm	500
517.1134	21 mm	500

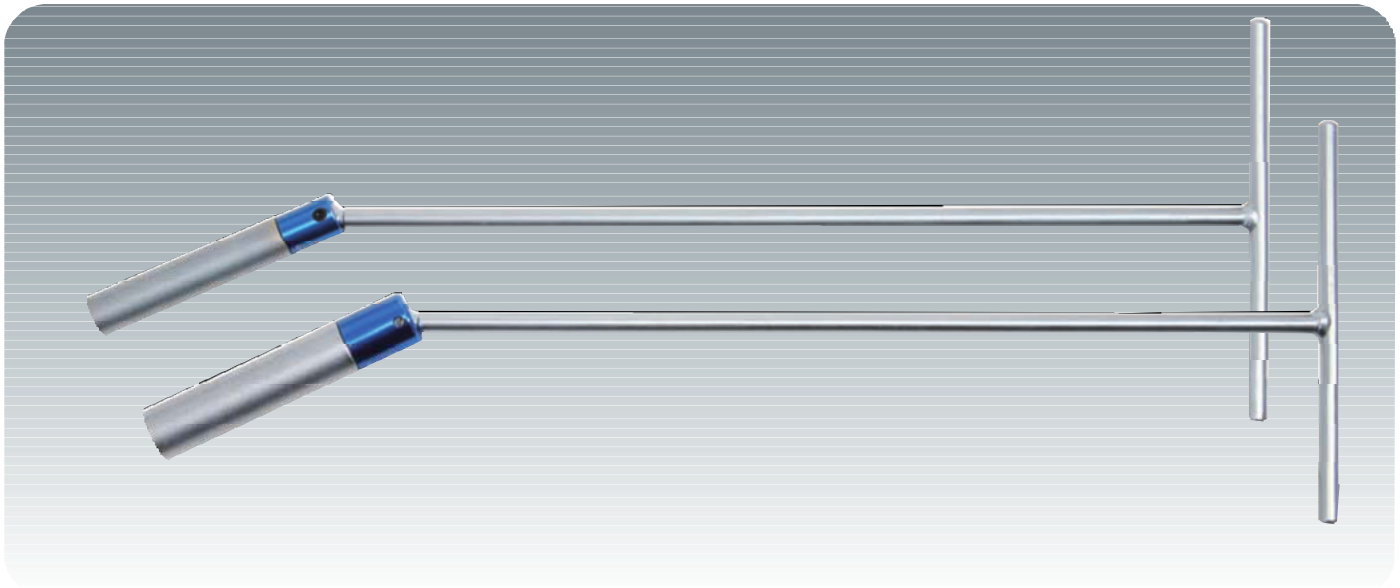

**Torque sparkplug T-Grip socket, with ball joint**

KS TOOLS	Torque	total length	socket length	outer socket Ø
517.1157 Torque sparkplug socket: dim. 16 mm	max. 23 Nm	585 mm	125 mm	21,7 mm
517.1159 Torque sparkplug socket: dim. 21 mm	max. 27 Nm	585 mm	138 mm	27,9 mm

- Prevents over tightening of sparkplug during installation
- Slim line design for deep set sparkplugs
- With rubber insert for a safe hold of the sparkplug in the socket
- Ideal for removing and installing

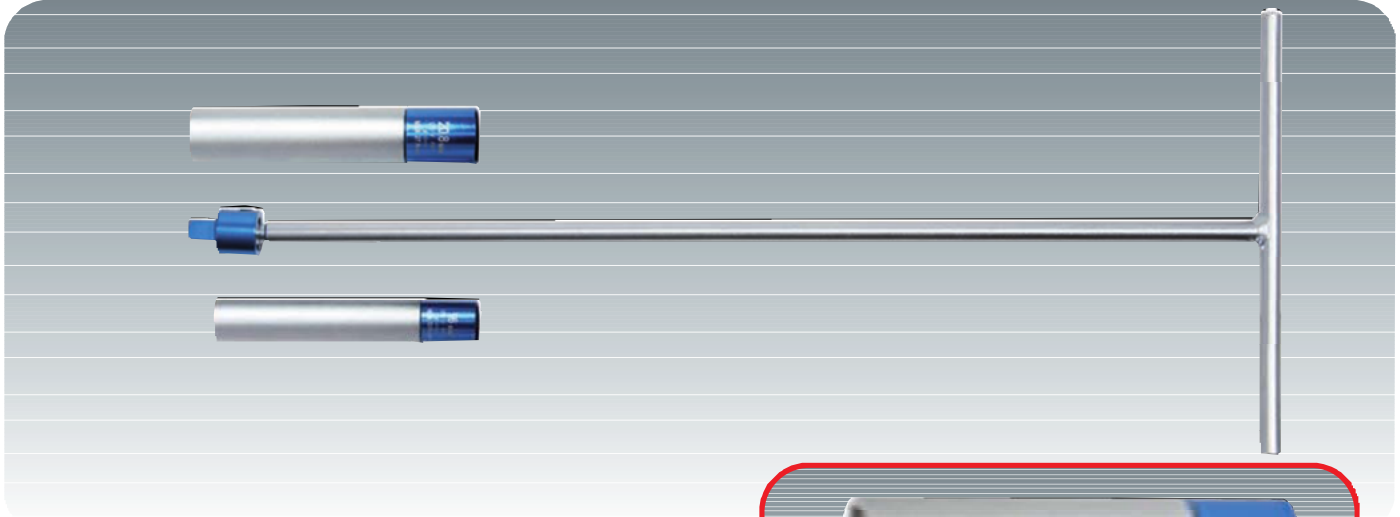

- 3/8" Torque sparkplug socket set, 3-pcs., with swivel T-Grip**
- KS TOOLS 517.1150** consists of:
- 1 x Torque sparkplug socket dim.: 16 mm, max. 23 Nm
  - 1 x Torque sparkplug socket dim.: 21 mm, max. 27 Nm
  - 1 x Swivel T-Grip 3/8", length 470 mm
- Avoids over tightening of sparkplugs when installing
  - Slim design, also for very deep seated sparkplugs
  - With rubber coating to safely hold the sparkplug in the socket
  - For both removal and installing

**3/8" Torque sparkplug sockets**

KS TOOLS	torque	length	external Ø
517.1152 Socket: 16 mm	max. 23 Nm	125 mm	21,7 mm
517.1154 Socket: 21 mm	max. 27 Nm	138 mm	27,9 mm



**3/8" Glow plug sockets set, 6-pcs.**

**KS TOOLS 500.7300** consists of:

- For the removal and fitting of glow plugs, in difficult to reach places
- The practical choice for the application, also for the new generation of glow plugs
- Total length 75 eg. 80 mm
- Stable screwed universal joint
- Including retaining ring for safely holding the glow plug

- 6 x Glow plug sockets: 8 – 9 – 10 – 12 – 14 – 16 mm



**3/8" Glow plug sockets**

<b>KS TOOLS</b>	size	↳ mm ↴	size	↳ mm ↴
500.7301	8 mm	75	500.7304	12 mm
500.7302	9 mm	75	500.7305	14 mm
500.7303	10 mm	75	500.7306	16 mm



### Glow plug inlay, 11-pcs.

**KSTOOLS 517.1165** consists of:

- Tool assortment for the mounting and removal of glow plugs in diesel engines
- Practical choice for past, present and next generation glow plugs
- Due to the fragile and expanding properties of glow plugs this universal set allows tightening and untightening to the specific torque values indicated by the manufacturer
- Care must be particularly taken when removing glow plugs so as not to damage or break them
- The pivot head glow plug sockets, as well as the flex-head ratchet spanners allow for removal of all types of glow plugs and make ease of removing glow plugs in difficult to reach places
- 1 x Torque wrench 3/8", 5 - 50 Nm
- 1 x Mushroom key, reducing square drive 1/2" x 3/8"
- 1 x Lockplus-extension 3/8", 150 mm
- 1 x Glow plug sockets 3/8", dim. 8
- 1 x Glow plug sockets 3/8", dim. 9
- 1 x Glow plug sockets 3/8", dim. 10
- 1 x Glow plug sockets 3/8", dim. 12
- 1 x Flex head combination ratchet spanner, dim. 8
- 1 x Flex head combination ratchet spanner, dim. 9
- 1 x Flex head combination ratchet spanner, dim. 10
- 1 x Flex head combination ratchet spanner, dim. 12
- PE foam System insert, resistant to workshop chemicals, removable, fits in KS Tools workshop trolleys!
- Dim.: 390D x 188W x 35H mm



**3/8" Torque limiter adaptor set, 2-pcs.**

**KS TOOLS 516.1500** consists of:

- Torque limiter for controlled tightening of sparkplugs which have a limit of 18 or 24 Nm
- Compatible with 3/8" sparkplug sockets

**516.1501** 3/8" Torque limiter 18 Nm

**516.1502** 3/8" Torque limiter 24 Nm



**3/8" Torque limiter, sparkplug set, 5-pcs.**

**KS TOOLS 517.1140** consists of:

- The ideal set for controlled tightening of sparkplugs without over tightening
- Inclusive 2 magnetic 250 mm long sparkplug sockets

**517.1141** 3/8" Sparkplug socket 16 mm, magnetic, 250 mm long

**517.1142** 3/8" Sparkplug socket 21 mm, magnetic, 250 mm long

**516.1501** 3/8" Torque limiter 18 Nm

**516.1502** 3/8" Torque limiter 24 Nm

**918.3800** 3/8" 72-teeth reversible ratchet



**3/8" CHROMEplus® Sparkplug service set, 7-pcs., chrome plated, mirror polished**

- KSTOOLS 918.0607** consists of:
- 4 x Sparkplug sockets 3/8": 14 - 16 - 18 - 21 mm, depth 63 mm
  - 1 x Extension with locking 3/8", 150 mm, knurled
  - 1 x Jointed reversing ratchet 3/8", curved shaft, length 270 mm



**3/8" CHROMEplus® Sparkplug sockets, length 63 mm, chrome plated, mirror polished**

KSTOOLS	dim.		
918.3990	14 mm	12 spline	☛
918.3804	16 mm	6 hexagonal	☛
918.3805	18 mm	6 hexagonal	☛
918.3806	21 mm	6 hexagonal	☛
918.3992	5/8"	6 hexagonal	☛
918.3991	13/16"	6 hexagonal	☛



**1/2" CHROMEplus® Sparkplug sockets, length 76 mm, chrome plated, mirror polished**

KSTOOLS	dim.		
918.1390	14 mm	12 spline	☛
918.1205	16 mm	6 hexagonal	☛
918.1207	18 mm	6 hexagonal	☛
918.1206	21 mm	6 hexagonal	☛
918.1391	5/8"	6 hexagonal	☛
918.1392	13/16"	6 hexagonal	☛